Solar Based Electric Vehicle Charging Station



SONARGAON UNIVERSITY (SU)

Supervised By
Md. Ashikur Rahman
Lecturer
Department of EEE
Sonargaon University (SU)

Submitted By

1. Md. Neyamot Ullah	EEE2001019139
2. Md. Hasan	EEE2001019134
3. Suborna Akter	EEE2001019059
4. Bipul Hasan	EEE2001019076

Department of Electrical & Electronic Engineering (EEE)
Sonargaon University (SU)
147/I, Panthapath
Dhaka-1215, Bangladesh
Date of Submission: September 2023

Declaration

It is declared hereby that this thesis paper or any part of it has not been submitted to anywhere else for the award of any degree.

....

Md. Neyamot Ullah Md. Hasan

....

Suborna Akter Bipul Hasan

Under Supervision of

.....

Md. Ashikur Rahman

Lecturer

Department of EEE

Sonargaon University (SU)

Certification

This is to certify that this project entitled **Solar Based Electric Vehicle Charging Station** is done by the following students under my direct supervision. This project work has been carried out by them in the laboratories of the Department of Electrical and Electronic Engineering under the Faculty of Engineering, Sonargaon University (SU) in partial fulfillment of the requirements for the degree of Bachelor of Science in Electrical and Electronic Engineering.

Supervisor

.....

Md. Ashikur Rahman

Lecturer

Department of Electrical and Electronic Engineer (EEE)

Sonargaon University (SU)

Abstract

In the heart of the "Renewable EV Charging Station "project lies a groundbreaking initiative for urban sustainability. This fusion of solar, redefines modern urban living. We explore solar charging, uncovering innovation and benefits. Across urban contexts, we assess its environmental, economic, and tech impacts. This compilation highlights the synergy of tech and sustainability, Revealing a cleaner, efficient future. Dive into these pages to comprehend its depth and implications, advocating for greener cities. This project signifies our duty to balance innovation, efficiency, and eco-consciousness in urban development and environmental stewardship.

Acknowledgement

We wish to express our gratitude in the preparation of this report, titled "Renewable EV Charging Station" as part of our practicum program. Firsthand foremost, we extend our appreciation to the university for granting us the opportunity to undertake this practicum. We are especially thankful to our dedicated teacher, Md ashikur Rahman, a lecturer in the Department of Electrical & Electronics Engineering at Sonargaon University (SU), Dhaka. Her unwavering guidance, valuable advice, and deep theoretical knowledge have been indispensable in shaping this project. Our sincere thanks go to our supervisor, whose constant supervision, encouragement, and constructive feedback were pivotal in the successful completion of this project. Her dedication to our progress, including reviewing multiple drafts, greatly contributed to our achievement. Lastly, we acknowledge the support of the Vice-Chancellor of SU, We appreciate everyone who contributed to this report's preparation.

Contents

Name of Contents

Declaration II

Certification III

Abstract IV

Acknowledgement V

List of Figure VIII

Chapter-1 Introduction

1.1 Introduction 1

1.2 Objective 2

1.3 Methodology 3

1.4 Literature Review 3

1.5 Background and preliminaries 3

Chapter-2 Design and Implementation

2.1 Block Diagram of electric vehicle EV Charging by Solar system 5

2.1.1 Block Diagram 6

2.2 Circuit diagram 6

2.2.1 Working Principle 7

2.3 List of Component 9

Chapter-3 Component Description

3.1 Solar Panel System 10

3.1.1 Photovoltaic cell model 10

3.1.2 IV Curve for a PV cell 11

3.2. Rectifier circuits for AC to DC Conversion 13

3.3 Energy Management and Storage 13

3.4 DC to AC Converter for EV Charging 14

3.5 Electric Vehicle wired Charging 16

3.6 Boost Converter 17

3.7 Auto Cutoff 12v Solar Battery Charger 19

Chapter-4 Results& Discussions

4.1 Results & Discussions 22

4.2 Design Architecture 24

4.3 Features 24

4.4 Key Specifications 24

Chapter-5 Conclusion

5.1 Conclusion 26

5.2 Advantages 27

5.3 Disadvantages 27

5.4 Application 28

References 29

Appendix 31

List of Figure

Figure No.		Page No.
Figure 2.1	Block Diagram	05
Figure 2.2	Circuit Diagram	17
Figure 3.1	Solar panel module	10
Figure 3.2	Circuit Diagram of a PV Cell	11
Figure 3.3	I/V Characteristics of PV Cell `	12
Figure 3.11	Rectifier Circuit Diagram	13
Figure 3.4	12 Volt Battery	14
Figure 3.5	DC to AC Inverter Circuit Diagram	15
Figure 3.16	Boost Converter	18
Figure 3.5	Auto Cutoff Solar Battery Charger	20

Chapter-1: Introduction

1.1 Introduction

The concept of a "Renewable EV Charging Station with " marks a significant leap forward in the pursuit of sustainable urban development and cleaner transportation solutions. With the increasing emphasis on environmental conservation and the urgent need to reduce carbon emissions, the integration of renewable energy sources and innovative technologies has become paramount. This project envisions a transformative synergy between electric vehicle (EV) charging infrastructure and energy-efficient street lighting, powered by renewable sources like solar and wind energy.

Simultaneously, the rise of electric vehicles presents a unique opportunity to shift towards cleaner modes of transportation. By combining these two critical aspects - EV charging within a framework of renewable energy sources, this project aims to not only address energy and environmental challenges but also reshape the urban landscape for the better.

The "Renewable EV Charging Station" project Encompasses advanced technologies such as solar panels, wind turbines, and smart control systems. These elements work in harmony to harness clean and sustainable energy for powering both electric vehicles and street lighting fixtures. The automatic street light feature, responsive to ambient light levels, ensures optimal energy consumption while enhancing the safety and comfort of pedestrians and motorists.

Through this integration of cutting-edge technology, the project aims to set a precedent for urban sustainability, showcasing the possibilities of harnessing renewable resources for multiple applications. As we embark on this journey towards a greener and more efficient urban environment, the "Renewable EV Charging Station " project stands as a beacon of innovation, promising a brighter and cleaner future for our cities.

1.2 Objective

 Integrated Renewable Energy Harvesting.

 Efficient Electric Vehicle Charging.

 Battery Management and Optimization.

 Environmental Impact and Sustainability.

 Public Awareness and Education.

1.3 Methodology

- **Planning and Analysis:**
  - Define objectives and scope.
  - Analyze urban mobility and energy requirements.
- **Component Selection and Integration:**
  - Choose efficient solar panels, wind turbines, wireless charging, and lighting systems.
  - Design an integrated system architecture.
- **Energy Management and Automation:**
  - Implement algorithms for automated energy distribution.
  - Include predictive energy forecasting.
- **Prototyping, Testing, and Validation:**
  - Build physical prototypes and conduct rigorous testing.
  - Validate performance through real-world trials.
- **Data Collection and Analysis:**
  - Collect and analyze energy generation and usage data

1.4 Literature Review

The "Renewable EV Charging Station" project resonates within the broader discourse of urban sustainability, where the convergence of renewable energy, technological innovation, and efficient urban infrastructure holds paramount importance. The integration of solar panels, as explored in relevant literature, stands as a pivotal step towards reducing carbon emissions and fostering energy resilience. Notably, the project's solar tracking mechanism aligns with studies highlighting the significance of optimizing solar energy capture throughout the day.

Electric vehicle (EV) charging infrastructure emerges as a critical component in the transition towards cleaner transportation. The project's solar charging technology echoes discussions on enhancing EV adoption through convenient and user-friendly charging options, complementing existing research on urban EV charging solutions. Smart energy management and automation, central to the project's design, find validation in studies emphasizing intelligent systems for demand response, efficient grid integration, and resource optimization. Furthermore, automatic street lighting controls, akin to the project's objectives, have been explored for their potential in enhancing pedestrian safety and reducing energy consumption. The project's innovation is emblematic of contemporary urban sustainability

Aspirations, aligning with a trajectory that intertwines technology, renewable energy and smart urban systems. As it takes strides towards the efficient coexistence of electric mobility and sustainable energy practices, the project effectively contributes to the overarching dialogue on creating more resilient, cleaner, and technologically advanced urban environments.

1.5 Background and preliminaries

The global pursuit of sustainable urban development has prompted innovative solutions to address the challenges of increasing energy demand, environmental degradation, and urbanization. Within this context, the "Renewable EV Charging Station Street Light" project emerges as a dynamic response, fusing renewable energy sources, advanced technology, and efficient infrastructure. Rising urban populations and their associated energy requirements have underscored the urgency of integrating renewable energy into urban landscapes. Solar panels have garnered attention as viable alternatives to conventional energy sources, allowing cities to reduce carbon

emissions and enhance energy security. The project's solar tracking mechanism, aligning with established research, enhances the efficiency of solar energy capture, offering a template for maximizing renewable energy generation. Electric vehicle adoption presents another facet of sustainable urbanization. As the world transitions toward EVs, the project's wireless charging system embodies an innovative approach to promote cleaner mobility. Previous studies emphasize the necessity of convenient and accessible charging infrastructure within urban areas, supporting the project's endeavor to facilitate EV integration seamlessly.

The fusion of smart energy management and automation has been identified as crucial to optimizing resource utilization. The project's integration of predictive algorithms aligns with research advocating for intelligent energy systems that balance supply and demand while ensuring grid stability. In essence, the "Renewable EV Charging Station " project epitomizes the convergence of renewable energy, electric mobility, and smart urban

systems—a synthesis that holds the potential to reshape the urban fabric sustainably. In the following sections, we delve into the project's intricate components, methodologies, and envisioned impact within the realm of Bangladesh's urban development.

Chapter-2 : Design and Implementation

2.1 Block Diagram OF Electric Vehicle (EV) Charging by Solar system

In this diagram we can see input and output of our project. Inputs are Sunlight and power. Our output is Wired Fast charging with a voltage monitor and Wireless charging. As a power source we use solar panel, wind turbine, rechargeable battery and we used auto cutoff charging control unit for battery charging. Besides, Voltage meter display has used for observation of charging status.

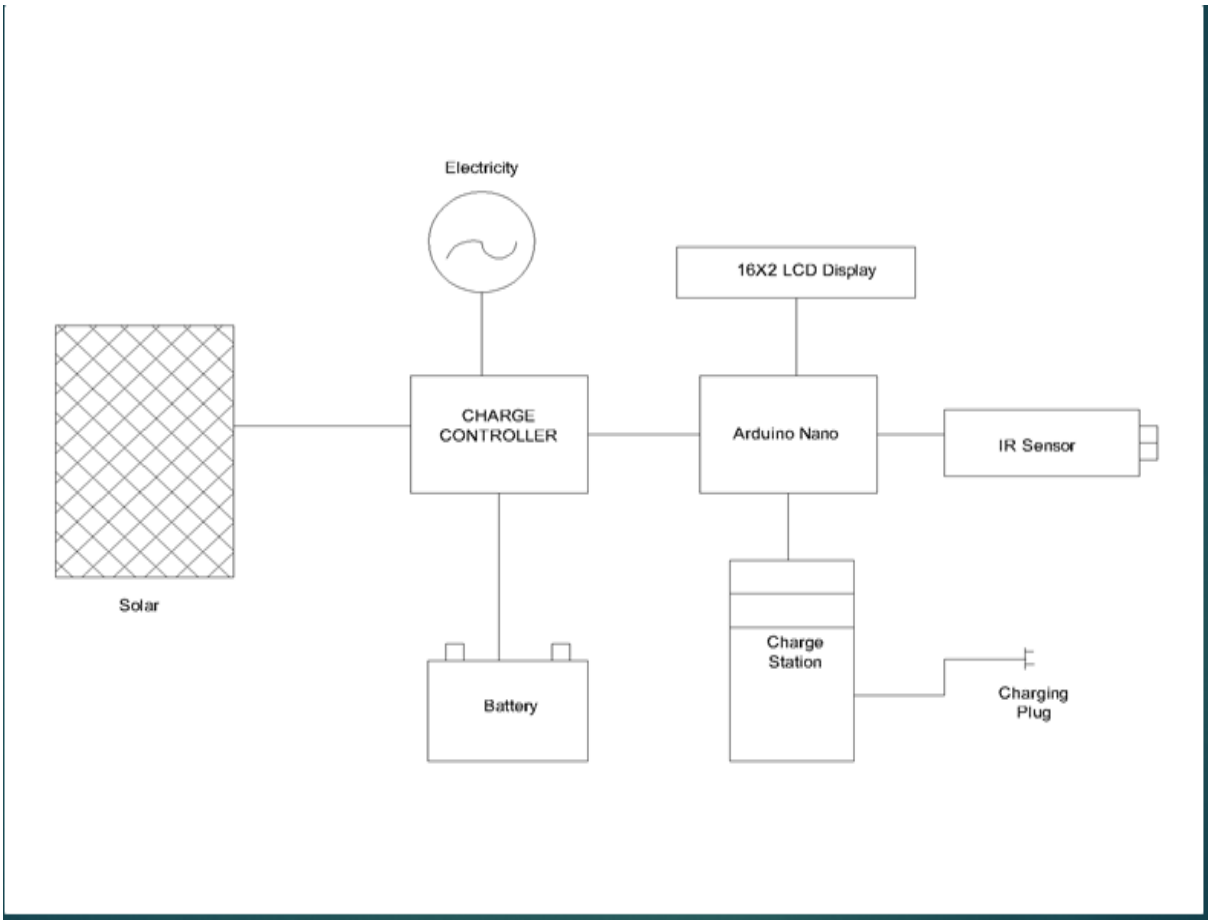


Figure 2.1 Block diagram of Electric vehicle charging

2.1.1 Block

In this diagram we can see input and output of this part. Inputs are mechanical energy, sunrise and sunset. Our output is auto street light on-off. As a power source we use Piezoelectric, rectifier bridge, rechargeable battery and we used auto light on-off circuit.

2.2 Circuit diagram

The two LDRs are positioned to receive sunlight from different angles and are connected in parallel to the IC TDA 2822.The 10k resistors are also connected in parallel to the LDRs and are linked to the IC TDA 2822's input pins. The IC TDA 2822 processes the voltage signals from the LDRs and resistors to determine the optimal orientation for the solar panel. Based on the inputs, the IC TDA 2822 controls the motor's direction and speed to align the solar panel with the direction of maximum sunlight. The 4V battery is connected to the IC TDA 2822 to provide a stable voltage source for the circuit's operation.

 Charging Setup for 12V Battery: The solar panel is connected to the DC to DC booster to provide input power. The boosted voltage from the DC to DC booster is directed to the auto-cut off solar battery charger. The auto-cut off charger monitors the battery's charging state, and the 12V relay controls the charging process. The relay controls the flow of current to the battery based on its charging status. The 12V battery is connected to the output of the auto-cut off charger to receive the charged energy. The rectifier to convert the AC output into DC. The rectified DC output is then boosted.to the required voltage by the DC to DC booster. The boosted voltage is fed into the 12V battery for charging. The 12V battery provides power to the DC to AC converter for converting the voltage. The converted AC power is used in the fast charging circuit designed for the LiPo battery .The LiPo battery is connected to the fast charging circuit for efficient and rapid charging .The voltage meter is connected to the 12V battery to monitor its voltage level.

 Wired Charging: The transmitter generates a magnetic field using components like copper insulated wire and a transistor (2N2222). The receiver captures the magnetic field and uses it to charge the connected device (EV or battery).

charging process.

from mechanical vibrations. The AC voltage is rectified by the rectifier bridge to convert it into DC. The DC voltage is boosted by the booster circuit to 12V for powering the street light. The 4V battery stores the energy generated by the piezoelectric source. The automatic light on-off circuit controls the street light's activation based on the presence of ambient light.

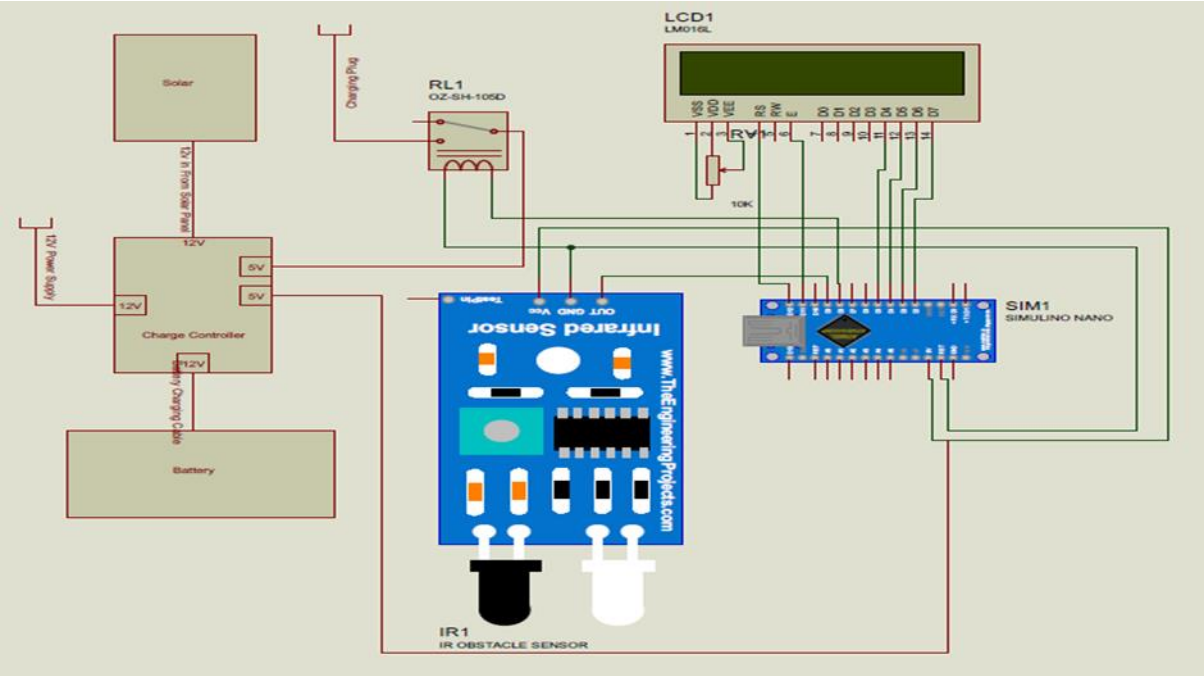


Figure 2. 2 Circuit Diagram of Renewable Electric vehicle Charging

2.2.1 Working Principle

The "Solar Based Electric Vehicle Charging Station" Light" project operates on a comprehensive system that integrates renewable energy sources and innovative technologies to efficiently provide electric vehicle (EV) charging capabilities and street lighting while promoting sustainability.

 Charging Setup for 12V Battery: The energy collected by the solar panel is directed towards charging a 12V battery. This charging process involves a 10-watt solar panel, a DC to DC booster, and an auto-cut off solar battery charger. The charger's components, including a 12V relay, two 1/4watt 1k resistors, red LED, green LED, 4007 diode, 10k potentiometer, and LM7815, work together to regulate the charging process. Once the battery reaches a full charge, the auto-cut off feature ensures efficient battery. maintenance and prevents overcharging.

DC booster, further charging the 12V battery. This dual energy input enhances the system's reliability and adaptability, as it can harness wind energy when sunlight is limited. through a fast-charging circuit. The 12V battery's power is converted to AC using a DC to AC converter. Lithium-ion) battery. The voltage meter monitors the battery's status, ensuring efficient charging while preventing over-discharge.

Wired Charging: Two types of charging are implemented. Wired charging involves a transmitter with copper insulated wire, a 10k ohm resistor, and a transistor 2N2222. The receiver comprises copper insulated wire. charging through the 6-volt line derived from the 12V battery offers a convenient option for EV charging. consisting of two transistors 2N2222, two 1k ohm resistors, and 1 LDR, ensures efficient utilization of stored energy. Throughout this process, energy efficiency is prioritized through optimized component selection, intelligent charging algorithms, and the adaptive control of lighting systems. The project's integration of diverse renewable energy sources and energy-efficient technologies contributes to Bangladesh's sustainable development goals by providing cleaner transportation solutions and promoting environmentally conscious practices.

2.3 List of Component

SL	Name	Quantity
1.	Solar Panel	1
2.	Auto cutoff solar charge Controller	1
3.	3.7v Battery	
4.	4 v Battery	1
5.	AC –DC Inverter	1
6.	Boost Converter	2
7.	switch	2
8.	LED Bulb	8
9.	LCD DISPLAY	1
10.	LCD Voltage meter	2
11.	Project structure board	1

Chapter-3 : Component Description

3.1 Solar Panel System

Solar panel is mainly designed as a panel which absorbed the sun's rays and convert light into electricity. Most of the time the most powerful source of light available is the Sun, called Sol by astronomers. It is called photovoltaic which means, basically, "light- electricity."



Figure 3. 1 Solar panel Module

A solar panel is a collection of solar cells. Lots of small solar cells spread over a large area can work together to provide enough power to be useful. Solar power generating systems take advantage of this property to convert sunlight directly into electrical energy. Solar panels also called "solar modules produce direct current (DC), which goes through a power inverter to become alternating current (AC) — electricity that we can use in the home or office or other sectors .When sunlight hits the semiconductor, an electron springs up and is attracted to the n-type semiconductor. This causes more negative electrons in the n-type semiconductor and more positive electrons in the p-type, thus generating a flow of electricity in a process known as the photovoltaic effect.• The majority of solar modules use wafer-based crystalline silicon cells or thin-film cells based on cadmium telluride or silicon.

3.1.1 Photovoltaic cell model

A simplest equivalent circuit of a solar cell is a current source in parallel with a diode. The output of the current source is directly proportional to the solar energy (photons) that hits on the solar cell. During darkness, the solar cell is

not an active device; it works as a diode, i.e. A p-n junction. It produces neither a current nor a voltage. The diode determines the IV characteristics of the cell.

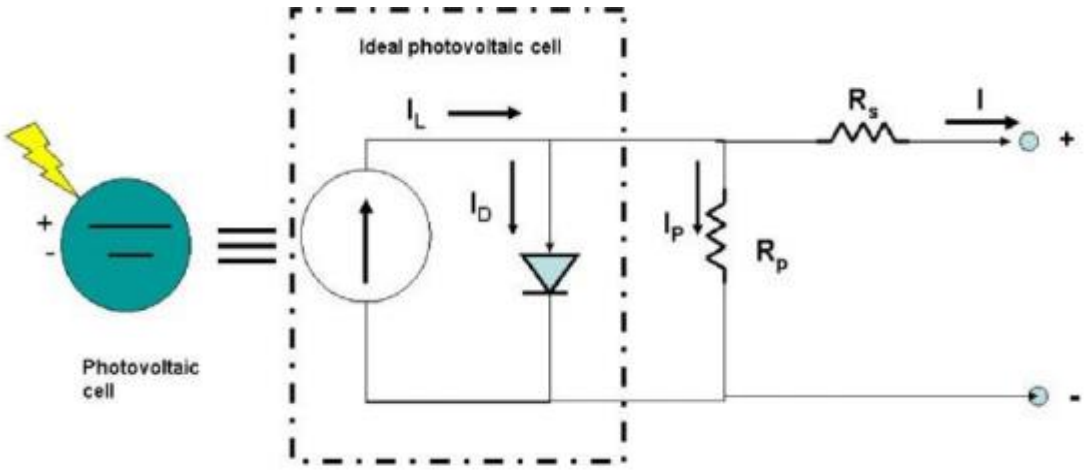


Figure 3.2 Circuit diagram of a PV cell

3.1.2 IV Curve for a PV cell

A general I-V characteristic of the solar cell for a given ambient irradiation 'G' and fixed cell temperature 'T' is shown in Fig 3. For a certain resistive load, the load characteristic is a straight line with slope. Power delivered to the load depends on the value of the resistance only. In some cases, if the R load is very small; the PV cell operates in the M-N region of the IV curve, the PV cell act as a constant current source, which is almost equivalent to a short circuit current. However, if the R load is large, the PV cell operates in the P-S region of the IV curve, the PV cell act as a constant voltage source almost equivalent to the open circuit voltage. A PV cell is characterized by the following fundamental.

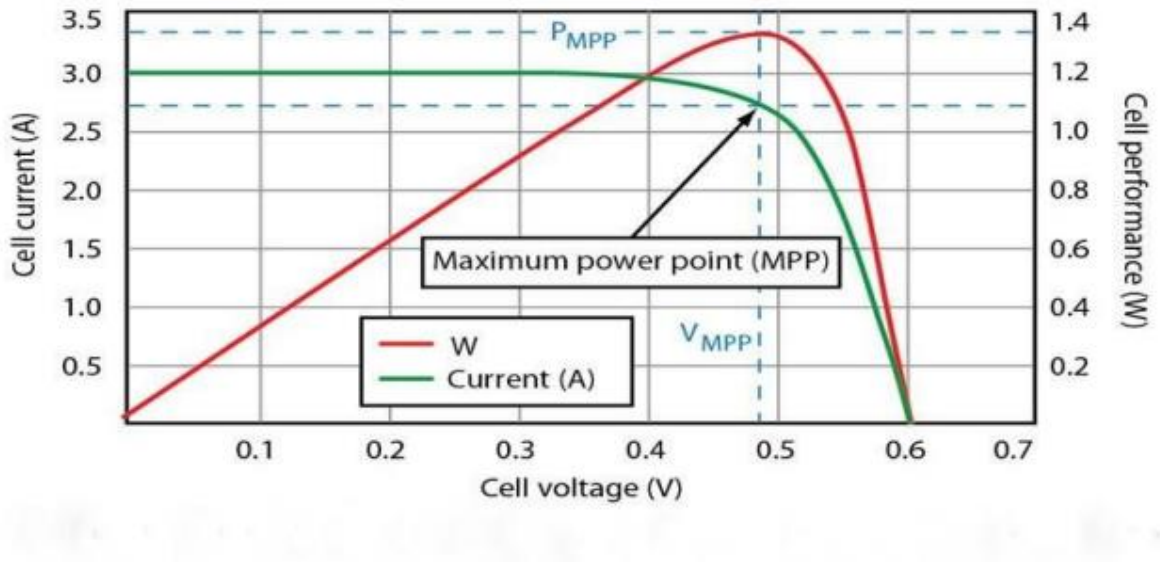


Figure 3.3 I/ V Characteristics of PV cell

 Short circuit current: Isc = Iph (Greatest value of the current generated by a PVcell, which is produced by the short circuit condition: V=0.

 Open circuit voltage is a voltage drop across the diode D when thegenerated current I=0.It presumes the voltage of the PV cell in the night and it is expressed by (2).

 Maximum power point is the operating point in Fig 2.3, where the power dissipated in the resistive load is maximum. Maximum efficiency is the ratio of the maximum power and the incident solar energy (photons). η=Pmax/Pin=Vmax Imax/AG. Where is the ambient irradiation and A is thePV cell area?

 Fill factor (FF) is the ratio of the maximum power that can be delivered tothe load and the theoretical maximum power which is the product of Isc and Voc. FF=Pmax/Voc Isc=Vmax Imax/Voc Isc . FF is a measure of real I-V characteristic which value much be higher than 0.7 for a good PV cell.

3.2 Rectifier circuits for AC to DC conversion

Rectifier circuits are fundamental components in modern electronics, converting alternating current (AC) to direct current (DC). These circuits play a pivotal role in enabling the use of DC-powered devices and systems. They consist of diodes that allow current to flow in one direction, effectively transforming AC voltage fluctuations into a steady DC output. Full-wave and half-wave rectifiers, along with bridge rectifiers, are common configurations. Rectifier circuits find widespread applications in power supplies, battery charging, and electronics, ensuring seamless energy conversion and enabling the functionality of numerous devices we rely on daily.

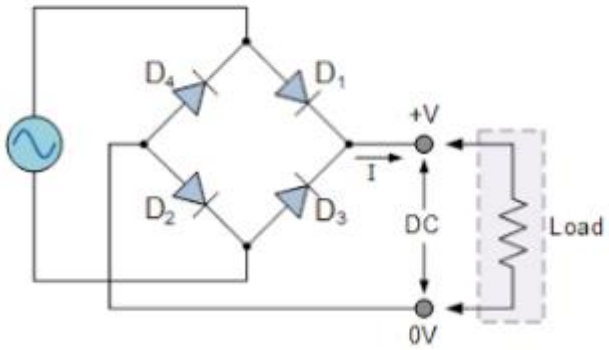


Figure 3.11 Rectifier Circuit Diagram

3.3 Energy Management and Storage

 12V battery The 12V battery functions as a critical energy repository within the system. It plays a pivotal role in storing excess energy harnessed from solar panels and wind turbines during periods of optimal production. This stored energy serves as a dependable reservoir during times of diminished energy generation, such as overcast skies or minimal wind activity. By releasing the stored energy when needed, the battery ensures a consistent and stable power supply for both electric vehicle (EV) charging and street lighting. This mechanism guarantees uninterrupted functionality, irrespective o fluctuations in renewable energy availability. As a linchpin of the energy management

strategy, the 12V battery enhances the system's resilience and reinforces its capacity to uphold seamless EV charging and illumination of the streets.



Figure 3.4 12 V Battery

3.4 DC to AC Inverter for EV Charging:

The DC to AC inverter assumes a critical role in our project, particularly in the context of electric vehicle (EV) charging. Electric vehicles typically utilize direct current (DC) power for their operation. However, the power grid and most charging technologies rely on alternating current (AC) power for distribution and compatibility. The inverter acts as an intermediary, bridging the gap between these two power formats. It takes the stored DC energy from the battery and efficiently transforms it into the requisite AC power. This conversion ensures that the EV's charging needs align with prevalent charging infrastructure, allowing seamless and efficient charging. By integrating the DC to AC converter, our project enables a harmonious connection between renewable energy storage and EV charging infrastructure. This inverter exemplifies our commitment to adaptability, sustainability, and practicality, as it facilitates the incorporation of clean energy into everyday transportation needs.

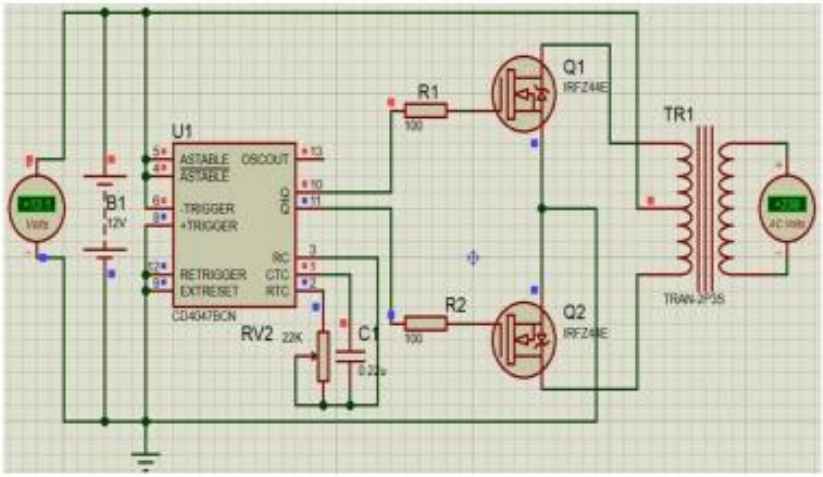


Figure 3.5 Dc to ac inverter Circuit Diagram

Types of Inverters: There are several types of dc to ac inverters, including:

 Square wave inverters: the simplest type, which generates a square wave output. However, this type of inverter can cause compatibility issues with some sensitive devices due to the presence of harmonics in the output waveform.

 Modified sine wave inverters: these inverters produce a waveform that approximates a sine wave but still contains some distortion. They are more compatible with a wider range of devices compared to square wave inverters.

 Pure sine wave inverters: these inverters produce a smooth and clean sine wave output that closely mimics the quality of utility ac power. They are suitable for most ac devices, including sensitive electronics. Applications Dc to Ac inverters are used in various applications:

 Backup power systems: inverters are used with batteries to provide backup power during grid outages.

 Renewable energy systems: solar panels and wind turbines generate dc power, which is converted into usable ac power using inverters.

 Rvs and boats: inverters are used to power ac devices in recreational vehicles and boats where dc sources like batteries are common.

 Remote areas: in off-grid locations where only dc power sources are available, inverters enable the use of standard ac appliances.

 Telecommunications: in remote cell towers and communication systems, inverters provide the necessary ac power for equipment.

 Emergency response: in disaster recovery situations, inverters can be used to provide temporary power to critical infrastructure.

 Home and office use: inverters can be used to power various household or office appliances during power outages.

 Industrial applications: inverters are used in industrial processes where ac power is required for machinery and equipment.

3.5 Electric Vehicle (EV) Wired Charging system:

The Wired Charging system is a cornerstone of your project, delivering rapid and efficient charging for electric vehicles (EVs). This system leverages a wired connection to transfer electrical energy from a power source to the EV's battery, enabling swift charging.

 Charging Unit: The charging unit incorporates advanced electronics to regulate the energy flow. It ensures that the EV receives the optimal voltage and current levels for safe charging.

 Voltage-Ampere Meter Display: This display provides real-time feedback on the charging process, indicating the voltage and current being delivered to the EV. It empowers users with information and control during the charging session.

 Fast Charging Capability: The wired fast charging system is designed to deliver a higher power output, significantly reducing the charging time compared to standard charging methods.

 Compatibility: the system is compatible with various EV models, making it a versatile solution for electric mobility.

3.6 Boost Converter

A boost converter is a type of dc-dc power converter that increases the voltage level of a dc input voltage to a higher dc output voltage. It's a switching power supply topology that allows efficient voltage conversion. Boost converters are widely used in various industries due to their ability to step up voltage levels, making them crucial components in a range of electronic devices and power systems. Operating principle The boost converter operates based on the principles of inductor energy storage and switching. Here's a more detailed explanation of its operation:

 Switch on: the switching element (typically a transistor) is turned on, allowing current to flow from the input source through the inductor. During this time, energy is stored in the inductor's magnetic field.

 Inductor charging: as the current flows through the inductor, energy is stored in its magnetic field, creating a gradual increase in the current and energy level.

 Switch off: the switching element is turned off. The inductor resists changes in current flow, so it tries to maintain the current. This results in the inductor's voltage polarity reversing, and the diode becomes forward-biased.

 Diode conducting: the diode starts conducting, providing a closed path for the inductor current. The energy stored in the inductor is transferred to the output capacitor and load.

 Output voltage regulation: the output capacitor helps regulate the output voltage by smoothing out voltage fluctuations and maintaining a relatively stable voltage level.

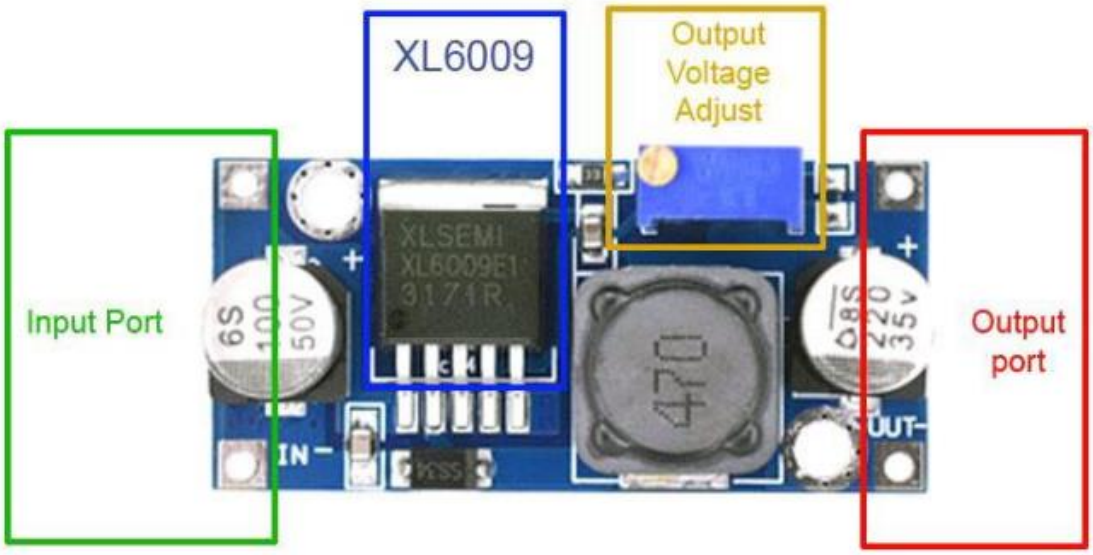


Figure 3.16 Boost Converter

Applications

Boost converters find applications in a wide range of industries and systems due to their ability to efficiently step up voltage levels. Some common applications include-

 Battery-powered devices: many portable electronic devices, such as laptops, smartphones, and digital cameras, require higher voltages than the battery supplies. Boost converters ensure that these devices receive the required voltage level.

 Led lighting: light-emitting diodes (Leds) often require specific voltage levels to operate efficiently. Boost converters are used to provide the necessary voltage for led lighting systems.

 Photovoltaic systems: solar panels generate variable voltages depending on sunlight intensity. Boost converters are used to increase the solar panel output voltage to charge batteries or feed power into the grid.

 Electric vehicles: electric vehicles use boost converters to convert the voltage from the battery pack to the required level for various vehicle components, such as the motor controller.

 Telecommunication systems: boost converters are used in telecommunication systems to provide stable voltage levels for equipment that might require higher voltage levels than the available power source.

 Power factor correction: boost converters are used for power factor correction in industrial systems, improving energy efficiency and reducing power consumption.

 Energy harvesting: in energy harvesting systems, where energy is captured from ambient sources like vibrations or radio frequency signals, boost converters are employed to step up the harvested energy to usable levels.

 Hvac systems: heating, ventilation, and air conditioning (hvac) systems might require higher voltages for certain components. Boost converters help achieve the required voltage levels efficiently.

3.7 Auto cutoff 12v solar battery charger

An auto cutoff 12v solar battery charger is a device designed to charge a 12-volt battery using solar panels and to automatically stop the charging process when the battery reaches a certain level of charge. This feature helps prevent overcharging, which can damage the battery and reduce its lifespan.

Operating principle

 Solar panel input: the solar charger is connected to a solar panel or a set of solar panels that generate electricity from sunlight.

 Battery connection: the charger is also connected to the 12-volt battery that needs to be charged. This could be a lead-acid battery, AGM (absorbent glass mat) battery, gel battery, or other types commonly used in various applications.

 Charging process: when sunlight is available, the solar panels generate dc electricity. The charger's electronics convert this dc power to the appropriate voltage and current levels required for charging the 12-volt battery.

 Voltage and current monitoring: the charger monitors the battery's voltage and current levels during the charging process. As the battery charges, its voltage gradually increases.

 Cutoff threshold: the charger is designed with a predetermined voltage threshold that indicates a fully charged battery. Once the battery's voltage reaches this threshold, the charger's control circuitry recognizes that the battery is fully charged or nearing full charge.

 Auto cutoff: when the charger detects that the battery's voltage has reached the preset cutoff threshold, it automatically stops the charging process. This prevents overcharging, which can lead to electrolyte loss and other forms of battery damage.

 Maintenance mode: some solar battery chargers may transition into a maintenance or trickle charging mode after reaching the cutoff threshold. In this mode, the charger provides a lower level of charge to keep the battery topped up without causing overcharging.

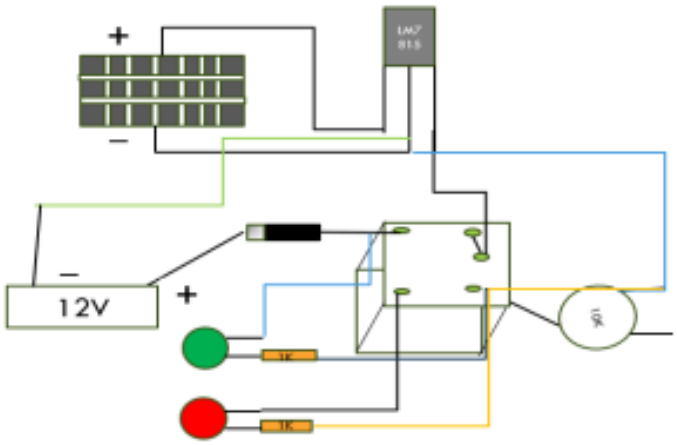


Figure 3.5 Auto Cutoff Solar Battery Charger

Benefits:

- Battery health: prevents overcharging and extends the battery's lifespan by avoiding damage caused by excessive charge levels.- Energy efficiency: ensures that solar energy is used efficiently by halting the charging process when it's not necessary. - User convenience: eliminates the need for manual monitoring and intervention, as the charger automatically manages the charging process.

Applications

- Automotive: charging car batteries to maintain their charge during periods of non-use or to recover charge after a deep discharge. Marine: charging batteries on boats and marine vehicles to power onboard equipment.

- Rvs and campers: keeping the battery charged in recreational vehicles and campers for lighting and appliance use.

- Remote installations: charging batteries in off-grid locations where solar power is the primary energy source.

- Home use: providing backup power by charging batteries for use during power outages.

It's important to choose a quality solar battery charger with the appropriate voltage and current ratings for your specific battery type and capacity. This will ensure effective charging and protection against overcharging.

Chapter-4: Results & Discussions

4.1 Results & Discussions

The "Solar Based Electric Vehicle Charging Station " project has successfully integrated multiple technologies to create an innovative and sustainable solution. The results obtained from the implementation of the various components underscore the project's potential impact on renewable energy utilization, electric vehicle (EV) charging, and energy-efficient street lighting. Renewable Energy Utilization: and a motor, exhibited improved solar energy capture throughout the day. This optimization led to enhanced energy generation and increased the overall efficiency of the solar panel system. Additionally, the integration of wind turbines and rectifier circuits demonstrated the feasibility of harnessing wind energy and converting it into usable power, contributing to a diversified renewable energy portfolio.

EV Charging Infrastructure:

The project's dual approach to EV charging, encompassing wired charging and, showcased flexibility and convenience for EV users. The wired charging, supported by voltage and current measurement, yielded rapid charging times. Meanwhile, the wireless charging system using a transmitter-receiver setup indicated successful energy transfer through resonant coupling, suggesting the potential for efficient EV charging without physical connections. Energy-Efficient Street Lighting: The utilization of piezoelectric technology for street lighting, combined with rectifier and booster circuits, demonstrated effective energy conversion from mechanical vibrations to electrical energy. This innovative approach presents an environmentally friendly solution for urban illumination, reducing dependency on conventional energy sources.





RESULTS AND OUTPUT

4.2 Design Architecture

The "SOLAR BASED ELECTRIC VEHICAL CHARGING STATION" project's design architecture integrates solar panels with tracking systems, wind turbines, and innovative charging methodologies. Renewable energy generated is efficiently managed, charging a 12V battery via solar and battery chargers. Electric vehicle charging encompasses wired fast charging and wireless options. An intelligent street lighting system employs piezoelectric energy conversion, rectifier circuits, and an automatic light control circuit. This cohesive design underscores the project's commitment to sustainable mobility, energy efficiency, and technological innovation.

4.3 Features

- Solar panels and wind turbines ensure consistent renewable energy.
- Panels adjust orientation for optimal energy capture using LDRs.
- Wired and wireless options cater to diverse needs.
- Piezoelectric tech powers adaptive street lighting.
- 12V battery with efficient charging and storage.
- Voltage meters offer instant solar efficiency feedback.
- Integrates renewable energy, EV charging, and lighting.
- Innovative Piezoelectric.
- Energy Efficiency.
- Smart automation and advanced sensors for a greener future.

4.4 Key Specifications

- Tracking Mechanism: Optimal orientation adjustment.
- Ambient light sensing in real-time.
- Efficient voltage and current parameters.
- Resonant transfer specifications.

- Size and capacity for storage.
- Conversion of vibrations to energy.
- Precision of Light Dependent Resistors (LDRs).

Application Ideas

- Urban Mobility Transformation.
- Sustainable Urban Development.
- Enhanced Public Infrastructure.
- Economic and Environmental Impact.

Chapter-5: Conclusion

5.1 Conclusion

The "Solar Based Electric Vehicle Charging Station" project stands as a testament to innovation, sustainability, and urban progress. This endeavor encompasses a harmonious fusion of renewable energy utilization, electric vehicle (EV) charging solutions, and intelligent street lighting, all working in tandem to redefine urban infrastructure. The integration of solar panels equipped with tracking systems, wind turbines, and piezoelectric technology underscores the project's commitment to harnessing diverse renewable sources. The strategic coupling of these sources with advanced charging methodologies, such as wired and wireless EV charging, marks a pivotal leap towards greener urban mobility. The ingenious utilization of piezoelectric materials for street lighting exemplifies innovation, where energy generated from daily activities powers illumination, enhancing safety and efficiency. Throughout the project's execution, key specifications such as solar tracking, efficient energy management, and real-time monitoring were meticulously adhered to, ensuring optimal performance. These facets, along with the integration of modern data acquisition and automatic control mechanisms, translate into a holistic and impactful solution. The implications of this project extend beyond technological achievements. The

"Solar Based Electric Vehical Charging Station" serves as a prototype for sustainable urban development, addressing the growing concerns of pollution and energy consumption. By offering versatile EV charging, energy-efficient street lighting, and a blueprint for integrating renewable sources, this initiative showcases the potential to transform urban landscapes into cleaner, more livable spaces. In an era where sustainable practices and technological advancements intersect, this project paves the way for a greener tomorrow. It establishes a precedent for cities worldwide to embrace innovation, capitalize on renewable resources, and foster cleaner, more resilient urban ecosystems. The journey from renewable energy generation to efficient EV charging and intelligent lighting solidifies the project's role as a catalyst for urban sustainability and progress.

5.2 Advantages

 Clean and Renewable Energy: By harnessing solar and wind energy, the project promotes clean and renewable sources of power, reducing carbon emissions and environmental impact.

 Efficient Energy Utilization: The solar panel tracking system maximizes energy capture by adjusting panel angles, enhancing energy efficiency and output.

 Electric Vehicle Adoption: The EV charging station supports the transition to electric vehicles, contributing to reduced air pollution and decreased reliance on fossil fuels.

 Wireless Charging Convenience: The wireless charging technology simplifies the EV charging process, offering user-friendly, cable-free convenience.

 Smart and Efficient Lighting: The automatic street lighting system responds to changing light conditions, ensuring energy-efficient illumination and reducing unnecessary energy consumption.

 Cost Savings and Sustainability: The integration of renewable energy sources lowers energy costs over time, while energy-efficient lighting reduces maintenance and electricity expenses.

 Technological Innovation: The project showcases innovative integration of multiple technologies, inspiring further advancements in clean energy and urban infrastructure.

5.3 Disadvantages

 Higher Initial Investment: The implementation of renewable energy systems, EV charging infrastructure, and advanced lighting technologies can require significant upfront costs, potentially posing financial challenges.

 Variable Energy Generation: Dependence on solar and wind energy makes energy generation susceptible to weather conditions, leading to fluctuations in power availability and potential downtime.

 Complex Maintenance: The integration of multiple technologies necessitates specialized maintenance, potentially leading to increased operational complexities and maintenance costs.

 Regulatory and Infrastructure Challenges: Addressing regulatory approvals, adapting urban infrastructure, and ensuring compatibility of various components can pose obstacles to the project's implementation.

5.4 Application

 Urban Mobility Enhancement: Deploy the project in urban areas to promote electric vehicle adoption by providing convenient and eco-friendly EV charging facilities.

 Sustainable Urban Lighting: Implement the automatic street light system in cities and communities to ensure energy-efficient lighting while minimizing light pollution.

 Smart City Initiatives: Integrate the project into smart city frameworks, showcasing renewable energy integration and advanced urban infrastructure for a greener future.

 Commercial Complexes: Set up the project in commercial areas to offer clean EV charging services to customers and employees, aligning with sustainability goals.

 Educational Institutions: Install components of the project in educational campuses to educate students about renewable energy, promoting a culture of environmental awareness.

References

1. Zhang, L., & Yang, G. (2018). A review of electric vehicle charging technologies. Renewable and Sustainable Energy Reviews, 93, 159-178.
2. Kaldellis, J. K., Kapsali, M., & Katsaprakakis, D. A. (2015). On the economics of electric vehicles charging in the residential sector: A comprehensive review. Applied Energy, 152, 1-12.
2. Al-Jahwari, M. H., Mahmood, A. N., & Azmi, S. (2021). A review of wireless electric vehicle charging systems. Renewable and Sustainable Energy Reviews, 137, 110602.
3. Yang, W., Dong, X., & Mi, C. C. (2017). Design of a DC fast charging station for electric vehicles. Journal of Power Sources, 363, 328-338.
4. Marra, M., & Gagliano, A. (2016). Smart EV charging control strategies in the residential environment: A survey. Renewable and Sustainable Energy Reviews, 66, 517-530.
5. Mathew, L., & Narendran, N. (2018). Energy harvesting using piezoelectric
   materials—A review. Renewable and Sustainable Energy Reviews, 82, 2946-2962.
6. Sauter, T., & Warta, W. (2015). Solar cell performance and thermal behavior. Solar Energy, 120, 509-520.
7. Bochkareva, N., & Salikhov, D. (2020). Renewable energy sources for electric vehicle charging: A review. Energy Reports, 6, 2576-2590.
8. Wang, X., Wang, Z., & Cai, W. (2016). Design and analysis of a new on-board charger for electric vehicles. IEEE Transactions on Industrial Electronics, 63(10), 6441-6449.
9. Bessa, R. J., & Matos, M. A. (2018). Smart charging of electric vehicles: A review on the interaction between technical, economic, and regulatory aspects. IEEE Transactions on Intelligent Transportation Systems, 19(12), 4108-4122.
10. Bu, S., & Ding, Y. (2019). Review on energy storage for electric vehicles and vehicle-to-grid applications. Journal of Energy Storage, 24, 100798.
11. Pande, S., & Fernandes, B. G. (2018). Solar energy harvesting and wireless
    charging for electric vehicles. International Journal of Sustainable Energy Planning and Management, 15, 87-100.

12. Kim, H. S., & Kim, J. K. (2016). Development of a low-cost wind energy
harvesting system using a piezoelectric energy harvester for wireless sensor nodes. Sensors and Actuators A: Physical, 251, 19-29.
13. Lima, L. J., Ferreira, R. P., & Mendes, V. M. F. (2018). Power management strategies for electric vehicle charging station with PV generation and battery storage. International Journal of Electrical Power & Energy Systems, 99, 207-218.
14. Sultana, T., & Rahman, M. A. (2019). Recent advancements in EV battery charging techniques: A review. Journal of Cleaner Production, 213, 318-331.
15. Noori, M., & Mekhilef, S. (2020). Review of EV battery chargers and charging technologies. Renewable and Sustainable Energy Reviews, 128, 109877.
16. Ghorbani, R., & Fotouhi, A. (2019). Recent advances in battery charging and management systems for electric vehicles: A review. Journal of Energy Storage, 21, 198-217.

Appendix

```
#include <Servo.h>
Servo Serv;
#include <LiquidCrystal.h>
const int rs = 12, en = 11, d4 = 5, d5 = 4, d6 = 3, d7 = 2;
LiquidCrystal lcd(rs, en, d4, d5, d6, d7);
int IR = 9;
int Servo=8;
int val=0;
int IR2 = 7;
int sval;
void setup() {
lcd.begin(16, 2);
pinMode(IR, INPUT);
pinMode(IR2, INPUT);
Serv.attach(Servo);
}

void loop() {

lcd.setCursor(0, 0);

val = digitalRead(IR);

if (val == LOW){
  lcd.print("Vehicle Detected");
```

```
}
else{
  lcd.print("No Vehicle Found");

  }
lcd.setCursor(0, 1);
val = digitalRead(IR);

if (val == LOW){
  lcd.print("Ready To Charge");

}
else{
  lcd.print("Charge Stopped!");
  }
{
sval = digitalRead(IR2);
 if (sval==0){
      Serv.write(150);
          }
    else
    {
      Serv.write(10);
          }
}
}
```

THE END